



## Wireless Internet Camera

Motion JPEG Compression, IEEE 802.11g/b

IC-1000Wg

### Easy Setup

No need to worry about complex network setup procedures. The install wizard can provide easy setup procedure to use camera.

### Simultaneous Viewing

This Internet Camera allows multiple users login to view live video simultaneously. The advanced video compression produces a high-quality, high-frame rate, VGA, CIF video stream.

### Standard Image Format

The Internet Camera delivers complete, high-quality pictures in standard JPEG format, which can be viewed using any standard browser.


### Support Windows-based and Web-based Monitoring Utility

These tools allow users to access the Internet Camera from a remote site via Intranet or Internet. They also provide users to make function configuration including image monitoring, recording images to a hard drive, viewing up to 4 cameras on one screen, snapshots and so on.

### Supports DDNS & UPnP

The camera also supports UPnP and DDNS. DDNS allows the camera to use an easier to remember naming format rather than an IP address. UPnP will allow users of Windows XP and ME to access the camera with the click of a mouse without knowing IP address of the camera.



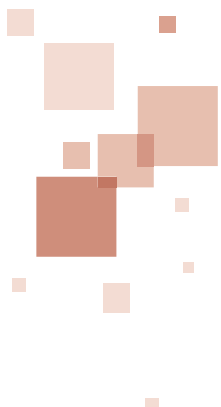

## Features

- Camera/Image
  - Motion-JPEG Image Video
  - Digital 24-bit Color
  - Provides Manual Focus Lens
  - Supports Up to 30 fps Video Frame Rate
  - Recording Format - Video (AVI), Snapshot (JPEG)
  - High Speed Hardware-Based Image Compression
- HTTP/Utility
  - Includes easy-to-use Viewer & Recorder utility
  - Provide Admin utility, Camera Viewer & WEB Management
  - View multiple cameras simultaneously - Up to 4 at a time
  - Supports four additional user accounts for viewing camera
  - Manual/Schedule/Cycle Record, Video Playback/Forward/Pause/Stop
  - Auto sending Snapshot by E-mail
  - LED light on/off adjustable.
  - Supports Windows 98SE/ME/NT/2000/XP/2003
  - Firmware Upgradeable
- Wireless Function
  - Enable/Disable Wireless LAN connection.
  - Support 64/128-bit data encryption function.

## Specification

Product	802.11g Wireless LAN Internet Camera
CPU+DSP	RISC + JPEG Encoder
Flash	512KB Flash
RAM	128KB SRAM
Image Sensor	300,000 Pixels 1/4" Color CMOS Sensor
Lens	Manual Focus, F=1.8
LAN Port	10/100M UTP Port x 1
Antenna	External 2dBi Dipole Antenna
Output Power	16dBm-18dBm
Power	12VDC, 0.5A Power Adaptor
Dimension	43mm x 130mm x 105mm
Temperature	0~45°C
Humidity	10~90% (Non-Condensing)
Certification	FCC, CE

Taiwan / Headquarters  
Edimax Technology Co., LTD.  
TEL:886-2-7739-6888  
FAX:886-2-7739-6887  
sales@edimax.com.tw

China  
Beijing Edimax Science &  
Technology Co., LTD.  
TEL:8610-6213-9288  
FAX:8610-6213-9231  
sales@edimax.com.cn

U.S.A.  
Edimax Computer Company  
TEL:1-408-496-1105  
FAX:1-408-980-1530  
sales@edimax.com

Latin America  
TEL:1-786-845-8099  
FAX:1-786-331-8490  
sales\_latinamerica@edimax.com

Europe  
Edimax Technology Europe B.V.  
TEL:31-499-377344  
FAX:31-499-372647  
sales@edimax.nl

U.K.  
Edimax Technology (UK) Ltd.  
TEL:44-870-7740226  
FAX:44-870-7740227  
info@edimax.co.uk